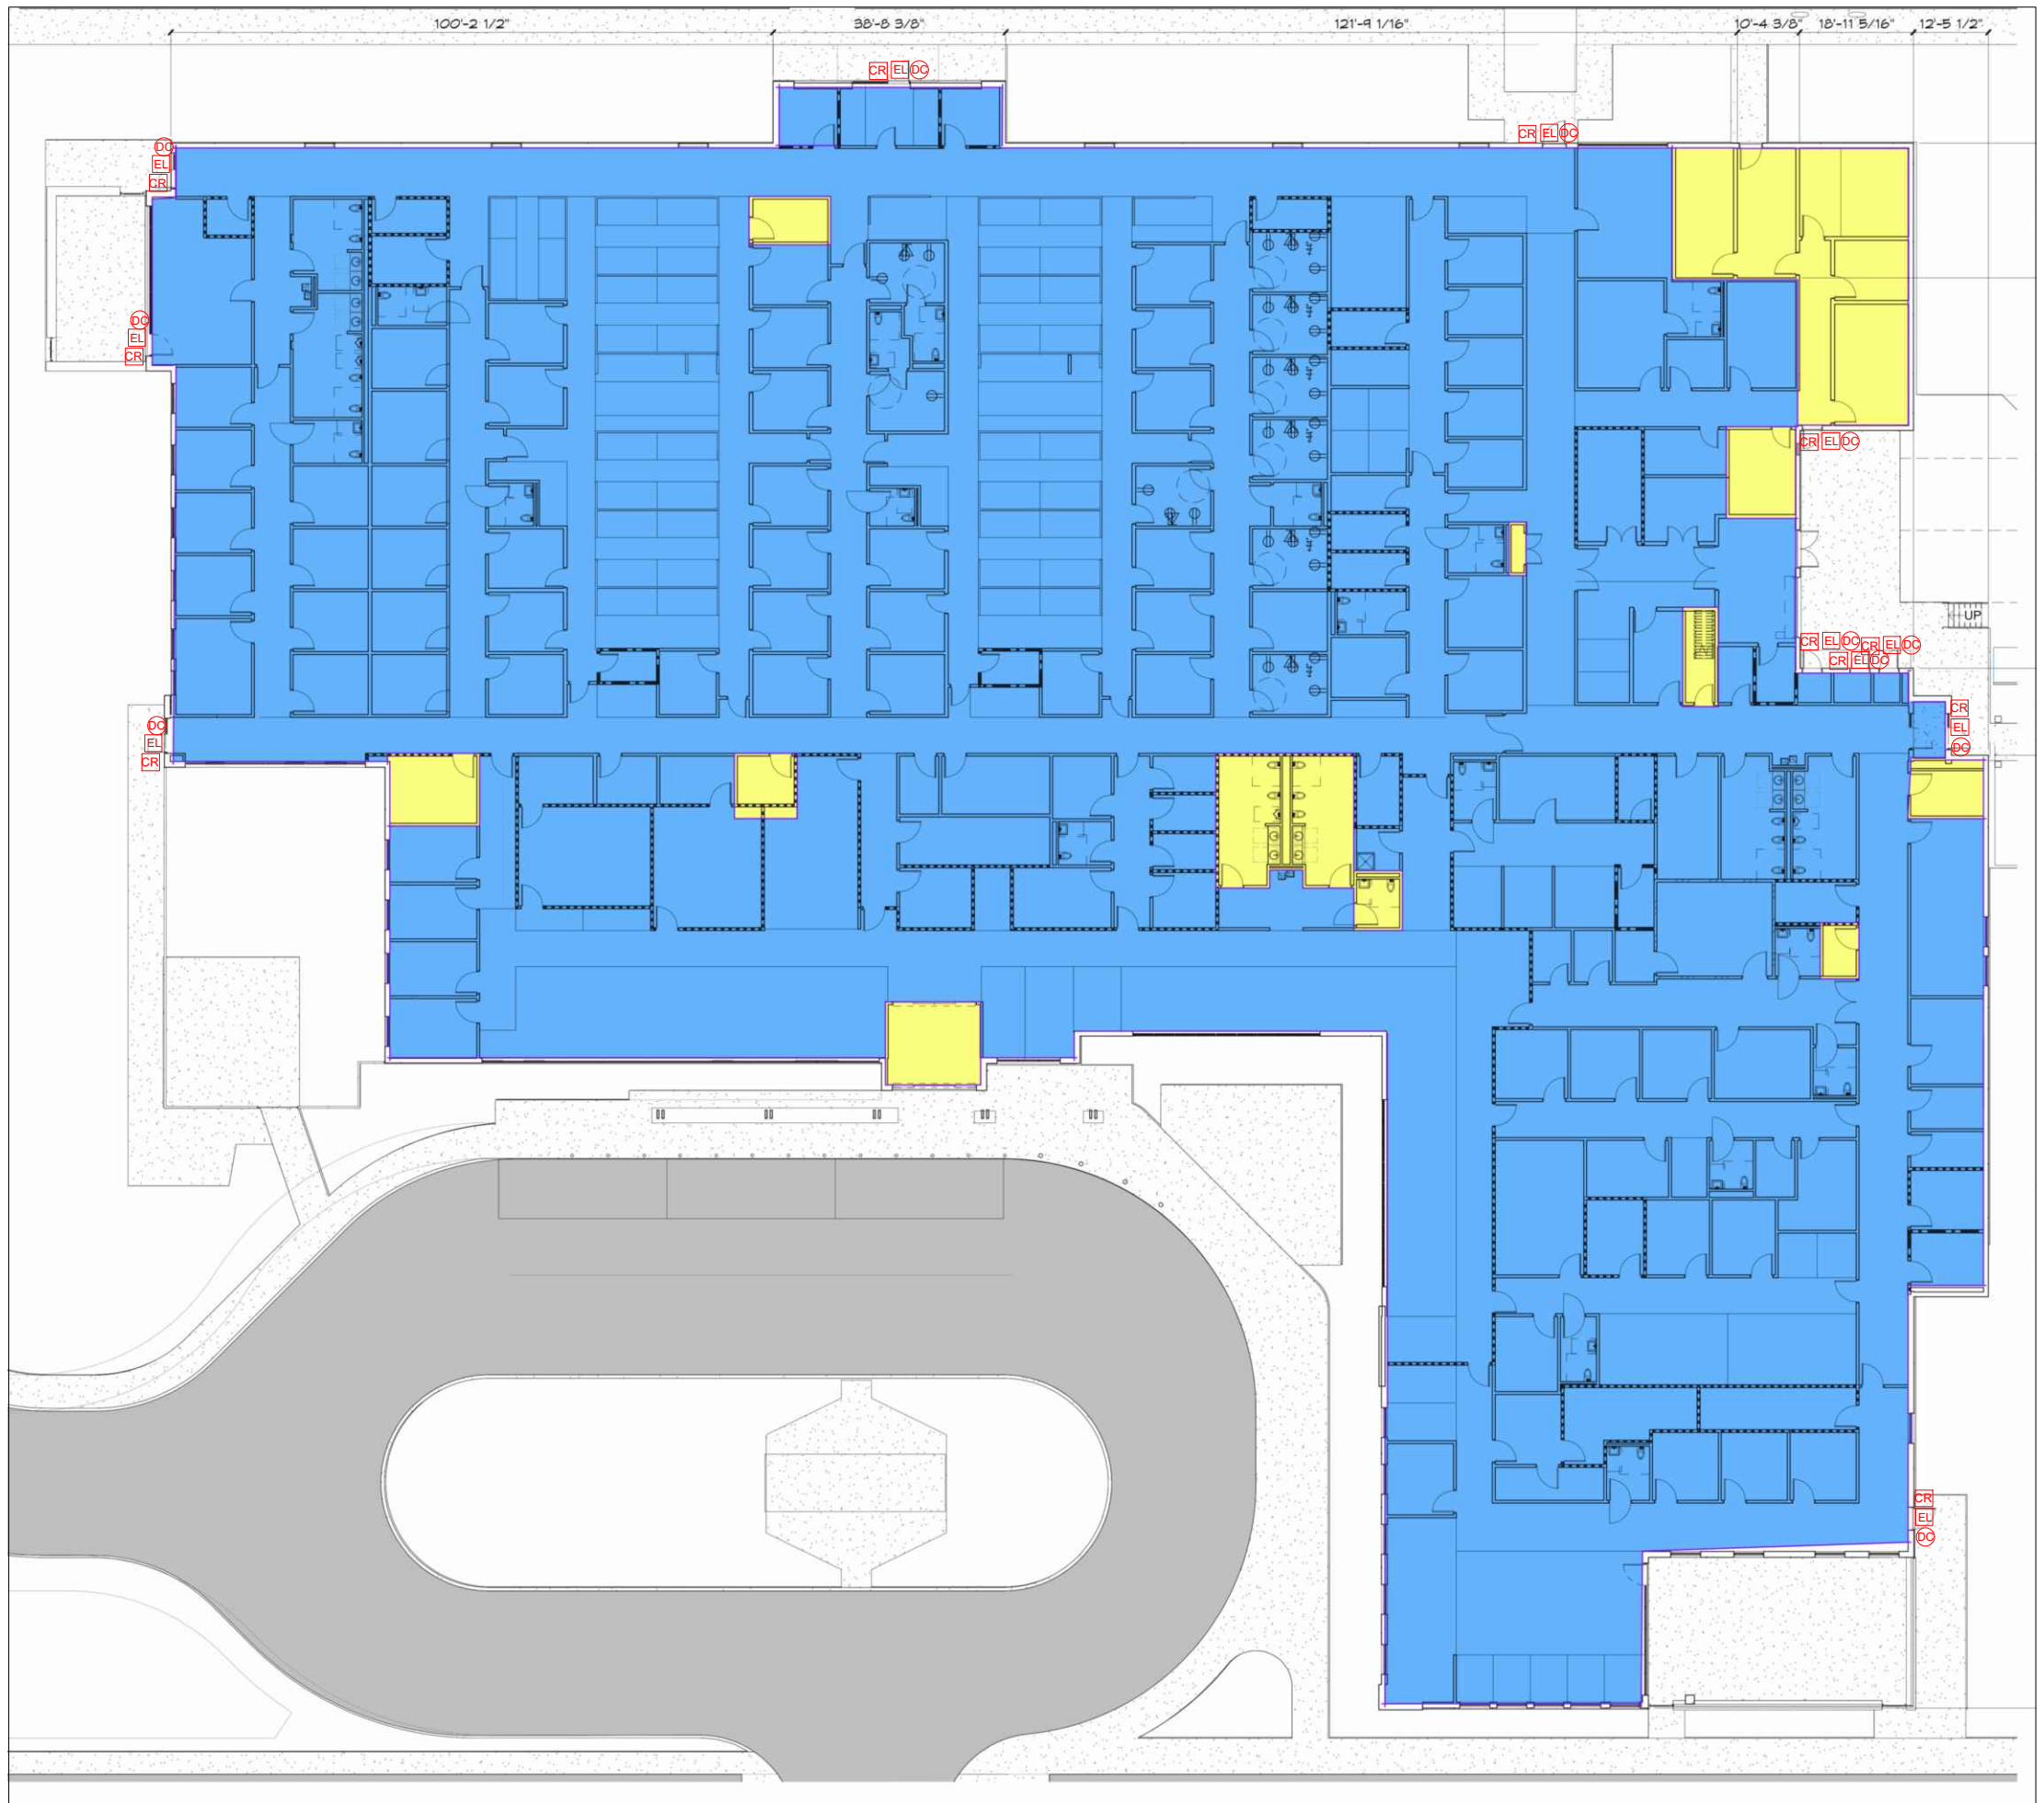

N

PLAN NORTH

1
A104

FIRST FLOOR

SCALE: 1/16" = 1'-0"

SYMBOL LIST

▼	TELEPHONE/DATA OUTLET WITH TWO (2) RJ-45, RUN 3/4" EMPTY CONDUIT
⦶	DUPLEX RECEPTACLE 20A-2P-125V/SPECIFICATION GRADE
⊕	DOUBLE DUPLEX RECEPTACLE, 125V, 20A GROUNDING
⌽	SPECIAL RECEPTACLE (TYPE AS INDICATED)
F	WALL MOUNTED FIRE ALARM
F◁	WALL MOUNTED FIRE ALARM HORN
F◀	WALL MOUNTED FIRE ALARM HORN AND STROBE
IC Cat5 E Cable	INTERCOM STATION AUDIO
CR	CARD READER
EL	ELECTRONIC LOCK
DC	DOOR CONTACT OR DOOR POSITION SWITCH
MAG	ELECTROMAGNETIC DOOR LOCK
REX	ROSSLARE EX BUTTONS
DPA	DOOR PROP ALARM
360° C1 C2 Cat6 Cable	C1 4MP MOTORIZED VARIFOCAL CAMERA C2 180 DEGREE CAMERA
TV	TELEVISION OUTLET (FOR ACS INSTALLATION ONLY PROVIDE COAXIAL CABLE FOR CABLE/SATELLITE AND VIDEO FEED. RUN 1" EMPTY).
IMSD	INTERCOM MASTER STATION DEVICE
WAP Cat6 A Cable	ACCESS POINT

GENERAL NOTE

1. CONNECT DEVICE AND EQUIPMENT CIRCUITS TO PANELBOARD 'HP1A' AND CIRCUIT NUMBER AS INDICATED. REFER TO PANELBOARD SCHEDULES FOR BREAKER SIZES AND ADDITIONAL INFORMATION. UNLESS NOTED OTHERWISE, CONDUCTORS SHALL BE SIZED PER NEC ACCORDING TO THE ASSOCIATED CIRCUIT BREAKER RATING.
2. LOCATIONS OF EQUIPMENT AND DEVICES SHOWN ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY ALL LOCATIONS AND COORDINATE WITH ARCHITECTURAL AND INTERIOR DESIGN ELEVATIONS, AS WELL AS NEC DEVICE SPACING REQUIREMENTS.
3. COMPLY WITH NEC REQUIRED WORKING CLEARANCES FOR ALL EQUIPMENT INSTALLATIONS. MAKE ALL MODIFICATIONS AND PROVIDE ALL NECESSARY WORK AND EQUIPMENT TO MOUNT ELECTRICAL EQUIPMENT IN GENERAL LOCATIONS SHOWN.
4. PROVIDE GROUNDING PER NEC FOR ALL EQUIPMENT AND DEVICES.
5. IN ADDITION TO DEVICES SHOWN, WIRELESS ACCESS POINTS, SURVEILLANCE EQUIPMENT, AND ADDITIONAL LOW-VOLTAGE SYSTEM COMPONENTS SHALL BE REQUIRED PER OWNER'S LOW VOLTAGE CONSULTANT. PROVIDE ALL RACEWAY AND POWER CONNECTIONS AS REQUIRED. LOW VOLTAGE CONTRACTOR TO PROVIDE ALL LOW-VOLTAGE DEVICES, CABLING, TERMINATIONS, SYSTEM PROGRAMMING, ETC.
6. REFER TO FIRE PROTECTION DRAWINGS FOR QUANTITIES AND LOCATIONS OF TAMPER SWITCHES AND FLOW SWITCHES.

KEYED NOTES 2

1. CONNECT DWELLING UNIT LOAD CENTER TO DISTRIBUTION PANEL INDICATED. REFER TO ENLARGED TYPICAL UNIT PLANS FOR ADDITIONAL WORK REQUIRED WITHIN UNIT.
2. REFER TO DETAILS FOR ADDITIONAL ELEVATOR PIT AND SHAFT REQUIREMENTS.
3. PROVIDE CONNECTION TO ROLL-UP DOOR LIFT.
4. PROVIDE 3/4" PLYWOOD BACKBOARD(S) FOR LOW VOLTAGE EQUIPMENT MOUNTING. PROVIDE POWER AND CONDUIT SLEEVES PER OWNER'S LOW VOLTAGE CONSULTANT. PROVIDE GROUNDING PER TYPICAL RISER DIAGRAM AND DETAILS.
5. PROVIDE HEAD-END CONTROL PANEL FOR TWO-WAY COMMUNICATION SYSTEM PER IBC1009.8 (2018). HEAD-END CONTROL PANEL SHALL CONNECT TO AND MONITOR ALL REMOTE STATIONS AND SHALL DIAL OUT TO OWNER'S MONITORING SYSTEM OR 911 FOR EMERGENCY RESPONSE.
6. PROVIDE NEMA 14-30 RECEPTACLE FOR DRYER. COORDINATE INSTALLATION WITH ACTUAL EQUIPMENT SELECTIONS.
7. COORDINATE EXACT LOCATION OF FDC NOTIFICATION DEVICE WITH LOCAL FIRE MARSHALL.
8. PROVIDE POWER CONNECTION AND FIRE ALARM CONNECTION TO (6) FIRE/SMOKE DAMPERS (FSD). CONNECT ALL FIRE SMOKE DAMPERS IN THIS AREA TO PANELBOARD 'HP1A', CIRCUIT 34.

ANSI/BOMA OFFICE AREA (ABOA)

🟨	COMMON AREA
🟦	OFFICE AREA

1.) FACP
2.) Yellow spaces devices, etc.
3.) Perimeter Access Controls

Consultants

genesis engineering group, llc.
134 fourth avenue north
franklin, tn 37064
www.geneng.net
project #22-133

Project Name

Sheehan Landing

Preston Highway (6000 block)
Louisville, KY 40219

Client

LDG Development, LLC

545 South 3rd Street
Louisville, KY 40202

CONSTRUCTION SET

Revisions

No.	Description	Date
A	KHC Tech. Comments	5/26/2023
B	KHC Tech. Comments	08/18/2023
1	Construction Set	11/08/2023
2	Revision #1	02/14/2024

LEVEL 1 OVERALL PLAN - POWER & SYSTEMS

Project number 21LD14
Date 05/26/2023

E101

Scale As indicated